



## UA400W, AUTOMATIC SPRAY GUN CLEANER



### THE PROFESSIONAL'S CHOICE FOR AUTOMATIC CLEANING

- High pressure water flows through 14 nozzles to wash paint from the paint passage and exterior of the spray gun. Pressing the rinse button, rinses the gun with fresh water. For drying, use blow gun.
- Designed to clean disposable cup adapters like PPS as well as conventional cup systems.
- Designed for use with Uni-ram's water cleaner, AQUA-KLEEN. This cleaner, which comes with the unit, effectively cuts and dissolves paint, enhancing the cleaning power of water.


### FOR WATERBORNE PAINTS

- AQUA-KLEEN solution lasts much longer than water alone. Many shops effectively clean spray guns with the same AQUA-KLEEN solution for **up to 3 months** before reclaiming or replacing the solution.
- Used AQUA-KLEEN water solution can be reclaimed for reuse using Uni-ram's COAG-KLEEN flocculant granules with Uni-ram's stand alone flocculation unit, UWF20M.

**AUTOMATIC CLEANING WITH UA400W IS CONSISTENT, THOROUGH, FAST AND ENVIRONMENTALLY FRIENDLY.**

# UA400W, AUTOMATIC SPRAY GUN CLEANER

## SPRAY GUN INSIDE CLEANING TANK

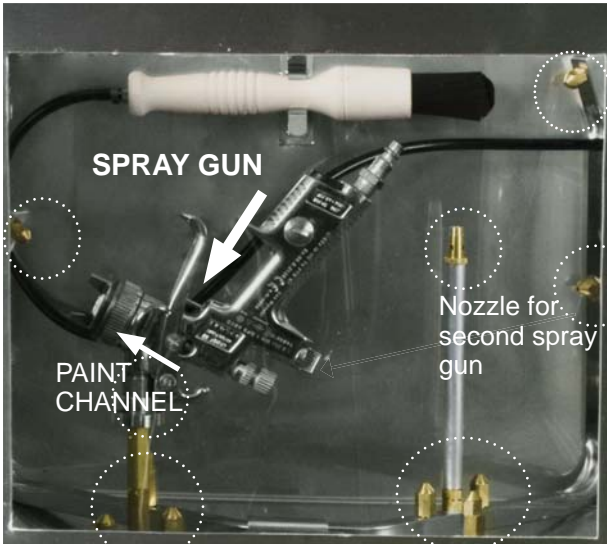

High Pressure Water flows through nozzles ( ) to clean spray gun.



WATER CLEANER,  
AQUA-KLEEN



DIAPHRAGM PUMP  
POWERS the UA400W



## Safety Features

- FM Approval pending and CE Approved.
- Safety Switch suspends cleaning cycle when lid is raised.
- Automatic cleaning is "Hands Free". Operator has minimum exposure to used water solution.

## Environmentally Friendly

- Wash water is reused until dirty. Used water can be reclaimed for reuse with a Uni-ram liquid recycler or treated with Uni-ram's flocculating agent, COAG-KLEEN and Uni-ram's independent flocculation unit, UWF20M.

## Features

- Automatic and manual cleaning. The automatic cleaning cycle consists of wash, rinse with fresh water, drying by Blow Gun.
- Flow-through Brush manually cleans exterior of gun. Brush is activated by a foot pedal.
- Top loading; cleans 2 guns.
- Non-corrosive components; stainless steel cleaning tank.
- Powered by Uni-ram's dual diaphragm pump that pumps at 2 gal per minute capacity.
- Complete with pressure regulator.
- 1 Year parts and labor warranty; 2 year exchange warranty on pump.

## Technical Data

- Dimensions  
26" W x 13.5" D x 40" H  
66 cm W x 34 cm D x 102 cm H
- Tank Dimensions  
17.5" W x 13.5" D x 14.25" H  
44 cm W x 34.0 cm D x 36.0 cm H
- Weight 90 lb / 41 kg
- Input Air Pressure: at least 85 PSI (6 bar)

Over 40,000 customers in 30 countries have bought Uni-ram spray gun cleaners.



Uni-ram Corporation  
381 Bentley Street,  
Markham ON  
L3R 9T2

Tel. 1-800-417-9133  
Fax 905-477-8922  
email salescan@uniram.com  
www.uniram.com